




The SEAL 62 Pro is the next generation professional laminator, an evolution of the successful SEAL 62 Plus. With fully adjustable temperature, speed and pressure settings the 62 Pro is ideal for the more experienced user who requires a highly versatile laminator.

The SEAL 62 Pro is capable of running a wider range of media and can generate higher process speeds, which make this machine ideal for businesses that are looking to build in extra capacity and more versatility. Capable of mounting, laminating and encapsulating prints up to 1575 mm, the machine can be used with the extensive range of SEAL laminating films, adhesives and substrates.

The 62 Pro features unique design elements such as an ergonomic touch pad control panel for ease of use; the Easy Feed table which incorporates built-in tensioning rollers as well as a flip down image guide for smooth and optimum infeed of media; and outfeed slitters to trim the output to size. These features maximise the performance and versatility of the 62 Pro without compromising its user friendly nature.

The 62 Pro is ideal for producing a wide variety of applications:


Rigid Indoor Displays



Flexible Indoor Displays



Floor Graphics



Backlit Displays



Pop-Up Displays



Rigid Outdoor Displays



The SEAL 62 Pro provides the following features

Optimum performance

- Adjustable settings for increased capacity and versatility
- Easy Feed table with built-in tensioning rollers and a flip down image guide for smooth and optimum in-feed of media
- Flip-up pull rollers for flatter results when encapsulating and for uninterrupted access when not encapsulating
- Manual nip-adjustment for precise operation
- 38 mm nip opening for processing a wide range of substrates
- Variable roller technology for better processing of soft substrates
- 2,5n/mm line pressure for superior cold lamination
- Three combi-supply shafts for maximum flexibility
- Automatic cooling fans for long runs and extended operations

Ease of use

- Ergonomic touch pad control panel
- Output slitters to trim the output to size during operation
- High release silicone rollers for easy cleaning
- Drop-in supply shafts with autogrip for easy loading of materials
- New design for swing up feed table to aid media handling and set-up
- Simple film tension adjustment
- Automatic upper take-up shaft for removing release liners
- Built-in roll-to-roll

Safety

- Foot switch for hands free operation
- Comprehensive safety system with emergency stops and self-checking safety eyes
- CE certified

Technical Specifications


| | | |
|-----------------------------|-------------------------------------|---------|
| Maximum Working Width | 1575 mm | |
| Maximum Speed | 6 m/min. | |
| Nip pressure | 2,5N/mm | |
| Maximum Substrate Thickness | 38 mm | |
| Maximum Roller Temperature | 140°C | |
| Roller Heating | Dual | |
| Width | 2220 mm | |
| Depth (incl. feed table) | 1070 mm | |
| Working Height | 900 mm | |
| Net Weight | 623 kg | |
| Shipping Dimensions | Width | 2280 mm |
| | Height | 1620 mm |
| | Depth | 900 mm |
| Shipping Weight | 673 kg | |
| Electrical Requirements | 3N/PE 230VAC +/- 10%, 50/60 Hz, 16A | |
| Order Code | 64137 | |

SEAL® is a registered trademark of SEAL Graphics

Easy Feed table with built-in tensioning rollers and a flip down image guide for smooth and optimum in feed of media.



Output slitters to trim the output to size during operation. Cooling fans for long runs and extended operations.

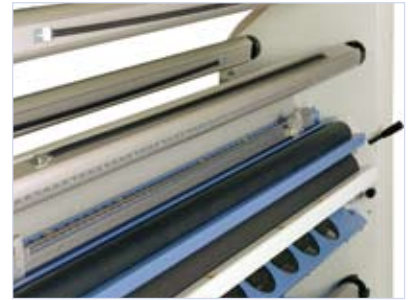

Manual nip-adjustment for precise operation.



SEAL Graphics Europe

Heesweg 16A
8102 HJ Raalte
The Netherlands
Tel: + 31 572 346 000
Fax: + 31 572 346 001
Customer services:
Tel: + 49 5722 2070

SEAL Graphics UK Ltd

1 Watkins Close
Burnt Mills Industrial Estate
Basildon, Essex SS13 1TL
United Kingdom
Tel: + 44 1268 722 400
Fax: + 44 1268 725 864

SEAL Graphics Asia

Room 2004-2005, 20th Floor,
Cable TV Tower, 9 Hoi Shing Road,
Tsuen Wan, New Territories
Hong Kong
Tel: + 852 2407 3738
Fax: + 852 2408 0973

SEAL for the Americas

7091 Troy Hill Drive
Elkridge
MD 21075
U.S.A.
Tel: + 1 410 379 5400
Fax: + 1 410 579 8960



Contact your local distributor: